

PRIORI T2

The **PRIORI T2's** low profile design hides easily in under cabinet lighting applications and other task lighting situations where a small bright white light is needed. The T2 lamp (3000° Kelvin) is both efficient and long lasting – the average lamp life is 8,000 hours – while providing excellent color rendering. Five convenient lengths (10", 14", 22", 28" and 32") and three popular finishes (Bronze, Brushed Steel and White) allow many choices to make a complete task lighting system that saves energy while operating at much lower temperatures than conventional light sources.



Bronze



Brushed
Steel



White



FEATURES

- Low profile design – only 15/16" high
- Bright white light – 30% more light than T4s and T5s
- New subminiature technology produces more than 40 lumens per watt saving 75% or more energy over incandescent
- Front lens cover prevents light leakage
- Frosted tempered glass lens diffuses light
- Full length specular reflector optimizes light output
- Magnetic lens closure reliably secures cover without clips or tabs that can bend or break
- Easy installation – lamp included with each fixture
- Tool free access to wiring compartment
- Choose from plug-in with included power cord or hard-wire featuring stab connectors and multiple knockouts


INSTALLATION EXAMPLES

PRIORI T2 uses the same layout options and installation accessories as the PRIORI Xenon.

See pages 6 and 7 for installation and layout examples, accessories list and assistance in determining a bill of materials.

Bill of materials for Figure 1, page 6 using PRIORI T2:

- (2) 043T-22-WH
- (1) 043J-WH
- (1) 043A-12-EX-WH

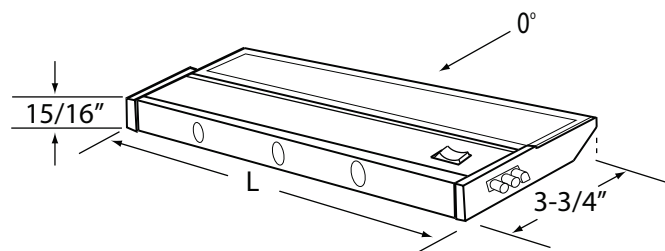

ORDERING INFORMATION

PRODUCT

043T		
PRIORI T2	10 = 10"	BR = Bronze
Fluorescent	14 = 14"	BS = Brushed Steel
	22 = 22"	WH = White
	28 = 28"	
	32 = 32"	

043T		
PRIORI T2	10P = 10"	BR = Bronze
Fluorescent	14P = 14"	BS = Brushed Steel
Cord and	22P = 22"	WH = White
Plug	28P = 28"	
	32P = 32"	

Note: PRIORI junction boxes and additional linking cables are sold separately.

OPTIONAL ACCESSORIES

043J	
Junction	BR = Bronze
Box	WH = White

Note: Each PRIORI junction box includes one 12" linking cable.

043A		
Linking	12-EX	BK = Black
Cables	24-EX	WH = White
	36-EX	
	PC6	

043T		30
Replacement	F06	
Lamps	F08	
	F13	
	F18	
	F24	

ACCESSORIES See page 7 for additional PRIORI accessories

pg 131		043T-F06/30 043T-F08/30 043T-F13/30 043T-F18/30 043T-F24/30	T2 fluorescent replacement lamp; 6, 8, 13, 18 and 24 watts; 8,000 hour lamp life, CRI = 90; 3000°K
--------	--	---	--

TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation
Construction	Heavy-gauge, extruded aluminum with plastic end caps and plastic ventilation spacers for heat dissipation
Dimensions	H = 15/16", W = 3-3/4", available Lengths = 10", 14", 22", 28" and 32"
Switching	On/Off rocker switch
Knockouts	3/8" knockouts standard: every 4" along the back and every 4" along top of housing; or use hardwire junction box (043J, sold separately) which includes four 3/8" knockouts, one 12" long "jumper cable", two reducers/wire clamps and pre-attached 'stab' connectors for quick connection
Wattages	10" size = 6 watts, 14" size = 8 watts, 22" size = 13 watts, 28" size = 18 watts, 32" size = 24 watts
Maximum run	600 watts
Packaging	Retail box with hang tab
Lamp specs	8,000 hour rated life, 90CRI, 3000°K, axial base for T2 sockets, 120V
Dimmers	Not dimmable
Diffuser	Full length, captive hinged lens cover with magnetic closure



P/H

ORDERING INFORMATION

PRODUCT

043X		
PRIORI Xenon	1 = 10" length 2 = 14" length 3 = 22" length 4 = 32" length	BR = Bronze BS = Brushed Steel WH = White

043X		
PRIORI Xenon Cord and Plug	1P = 10" length 2P = 14" length 3P = 22" length 4P = 32" length	BR = Bronze BS = Brushed Steel WH = White

Note: PRIORI junction boxes and linking cables are sold separately.

OPTIONAL ACCESSORIES

043J	
Junction Box	BR = Bronze WH = White
Note: Each PRIORI junction box includes one 12" linking cable.	

043A		
Linking Cables	12-EX 24-EX 36-EX PC6	BK = Black WH = White

043X-20BP
Replacement Lamp

ACCESSORIES

-		043J-BR 043J-WH	Hardwire junction box for PRIORI fixtures 7-3/8"L x 2-1/8"W x 1"H male/female moxex connections (4) Knockouts, BR onze or WH ite Includes 12" extension. c/UL/us Listed
-		043A-PC6-BK 043A-PC6-WH	Six foot power cord for PRIORI fixtures 120V AC grounded plug and 3-wire grounded moxex connector BlacK or WH ite, c/UL/us Listed
-		043A-12-EX-BK 043A-12-EX-WH	Linking cable for PRIORI fixtures male/female moxex connectors Length: 12" BlacK or WH ite c/UL/us Listed
-		043A-24-EX-BK 043A-24-EX-WH	Linking cable for PRIORI fixtures male/female moxex connectors Length: 24" BlacK or WH ite c/UL/us Listed
-		043A-36-EX-BK 043A-36-EX-WH	Linking cable for PRIORI fixtures male/female moxex connectors Length: 36" BlacK or WH ite c/UL/us Listed
pg 131		043X-20BP	120V xenon replacement lamp 20 watt bi-pin, G8 MOL = 1-3/4"