

18W LaBelle Floor Lamp

G18LP2

BULB INSERTION / REPLACEMENT

- 1 Make sure that the lamp is not plugged into an electrical socket.
- 2 If the lamp has been in use, allow it to cool for approximately five minutes before proceeding.
- 3 To remove a bulb already installed in the lamp, grasp it firmly in your hand and pull it straight out of the socket. Do not twist or turn the bulb while removing it from the socket.
- 4 To install a bulb (H) in the socket, grasp the bulb firmly in your hand. Push the bulb straight into the socket (in alignment with the notches), by applying pressure to the base of tube, until it “snaps” into place. Do not apply pressure to the glass end of the bulb.
- 5 Plug the lamp into a standard 120V socket, and your lamp is ready for use.


LAMP ASSEMBLY

- 1 Make sure that the lamp is not plugged into an electrical socket.
- 2 Insert the main pole (I) into the hole in the base (L) and tighten by hand, turning clockwise.
- 3 To adjust lamp height, turn ring (K) counter-clockwise. Adjust upper pole (J) to desired height, and tighten ring by turning clockwise.

- 4 To adjust position of shade holder (M), turn nut screw (C) counter-clockwise. Adjust shade holder (M) to desired height, and tighten screw by turning clockwise.

- 5 To adjust tilting position of lamp shade (G), turn nut screw (F) counter-clockwise. Adjust lamp shade (G) to desired height, and tighten screw by turning clockwise.

- 6 To attach the shade (G), carefully remove the shade from the box. Insert the shade into the shade holder (M). Tighten the three screws (E), at the base of the shade holder, by turning them clockwise until the shade is secure on the lamp.

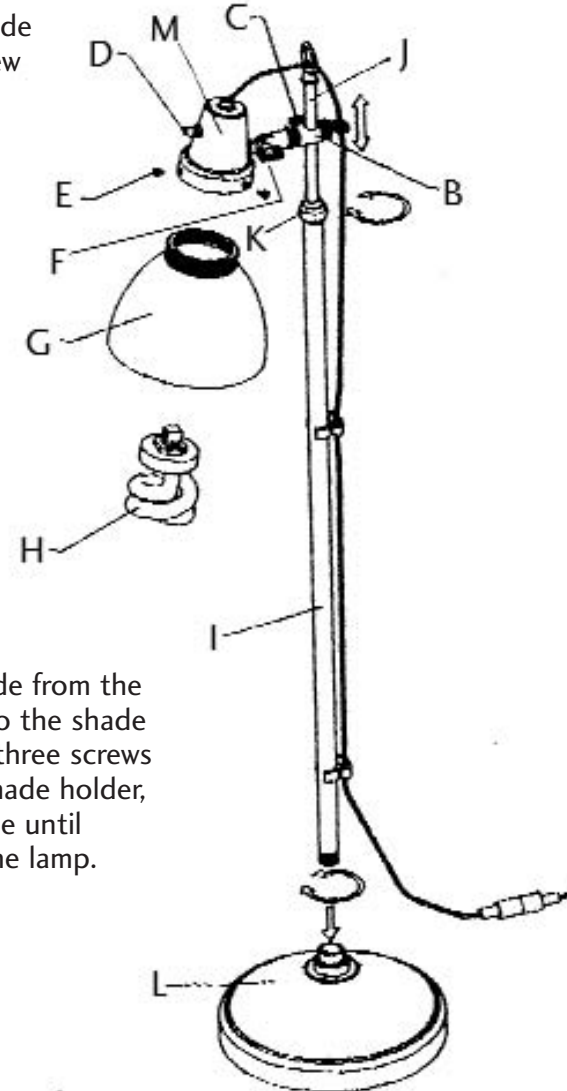

Please note that in operation, OTT-LITE bulbs are not dimmable.
Enjoy your OTT-LITE® LaBelle Floor Lamp!