

13W Easel Lamp

OTL13ETC


TUBE INSERTION / REPLACEMENT

- 1 Make sure that the lamp is not plugged into an electrical socket.
- 2 If the lamp has been in use, allow it to cool for approximately five minutes before proceeding.
- 3 Rotate the shade so that the notch in the base of the shade is positioned over the tab located on the socket assembly (refer to the diagram for proper shade position).
- 4 Remove the shade by pulling it straight out from the socket assembly.
- 5 To remove a tube already installed in the lamp, grasp it firmly in your hand and pull it straight out of the socket. Do not twist or turn the tube when removing it from the socket.
- 6 To install a tube in the socket, grasp the tube firmly in your hand, position the tube so that it is aligned as pictured in the diagram, then push the tube straight into the socket until it "snaps" into place.

- 7 To replace the shade, position it as indicated in the diagram, then push it back into the socket assembly making sure the shade "snaps" into place.
- 8 Rotate the shade to the desired position for use.
- 9 Plug the lamp into a standard 120V socket, and your lamp is ready for use.

LAMP ASSEMBLY

- 1 To attach the light to your easel, position the clamp on a solid leg or brace of the easel, then tighten the knob (A). Once attached, the position of the light can be easily changed by loosening part (B) and/or (C), moving the light to the desired position, then re-tightening part B and/or (C).
- 2 To rotate or raise the stem of the lamp, loosen the lock (D) by pulling the end of the lock away from the stem. Re-position the light as desired, then close the lock by pushing the end of the lock back towards the stem until it snaps into place.

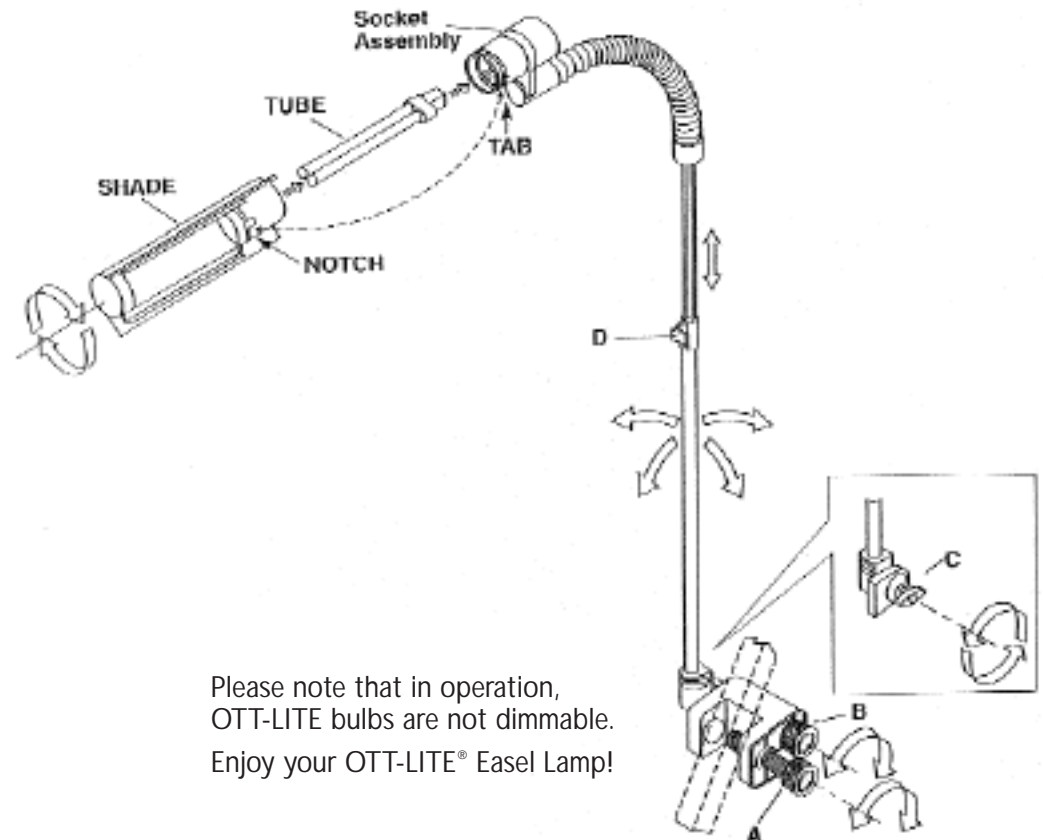

Please note that in operation, OTT-LITE bulbs are not dimmable.
Enjoy your OTT-LITE® Easel Lamp!