

27W Arial 2-in-1 Lamp


PS145M

Instruction Manual



BULB INSERTION / REPLACEMENT


- 1 Make sure that the lamp is not plugged into an electrical socket.
- 2 If the lamp has been in use, allow it to cool for approximately five minutes before proceeding.
- 3 Lift up the shade so that the tube is visible.
- 4 To remove a tube already installed in the lamp, turn the tube in the sockets until the pins are visible, then grasp each end of the tube (A) firmly and pull it straight down out of the sockets (B1, B2). Do not twist or turn the tube while removing it from the socket.
- 5 To install a tube in the socket, grasp each end of the tube and line up the pins with the sockets (B1, B2) in the shade. Firmly press the tube upwards into place, then turn the tube in the sockets until the pins are no longer visible and they lock into place. Do not apply pressure to the middle glass section of the tube.

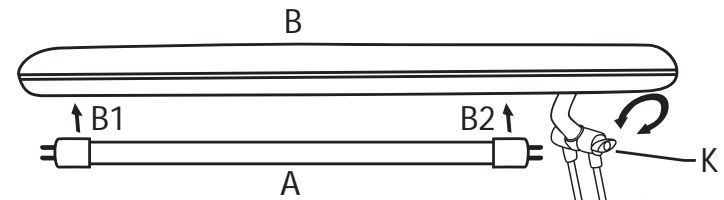

LAMP ASSEMBLY

- 1 Make sure that the lamp is not plugged into an electrical socket.
- 2 Screw the lower pole (D) into the base (E).
- 3 Screw the upper pole (F) into the lower pole (D).
- 4 Slip dowel protruding from lamp base (G) into hole in upper pole (F).
- 5 Attach clips (H) onto lamps upper and lower pole to retain electric wire.
- 6 To adjust lamp, turn nut screws (J, K) counter-clockwise to loosen. Adjust lamp to desired position and tighten nut screws by turning clockwise.
- 7 Plug the lamp into a standard 120V socket, and press the power switch (C).

Note: To use as a table lamp, attach clamp (L) to table, desk, shelf or other solid surface and insert dowel at end of lamp (G) into clamp.

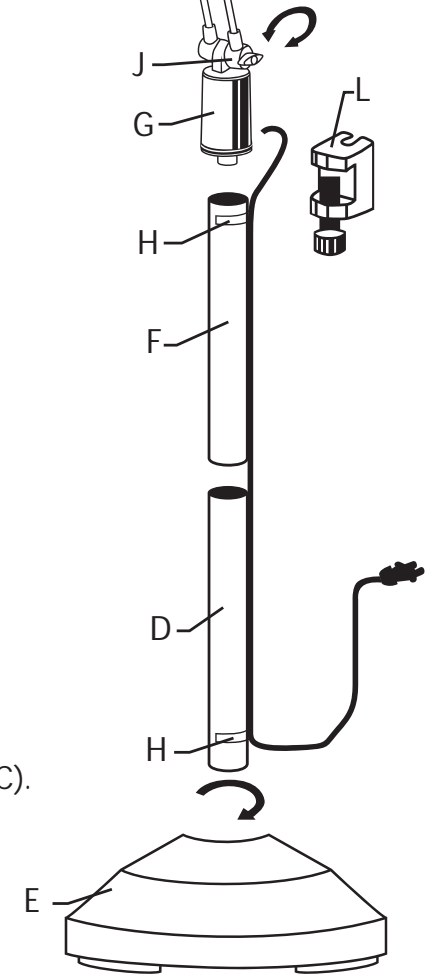

Please note that in operation, OTT-LITE bulbs are not dimmable.
Enjoy your OTT-LITE® Arial 2-in-1 Lamp!